

- PRIMARY WIRE
- PARALLEL WIRE

## PRIMARY WIRE

### GENERAL PURPOSE





Single conductor copper stranded thermoplastic insulated primary wire is standard for original equipment and replacement on automotive equipment. The thermoplastic insulation operates satisfactorily between the extreme temperatures of -30 to +165 fahrenheit and -34 to +74 centigrade. It is highly resistant to grease, oil and acids and is available in ten bright colors for easy identification.

#### COLOR CODES

- 0 BLACK
- 1 BROWN
- 2 RED
- 3 ORANGE
- 4 YELLOW
- 5 GREEN
- 6 BLUE
- 7 PURPLE
- 8 GRAY
- 9 WHITE

SIZE	PART NUMBER
20 GAUGE	CW20
18 GAUGE	CW18
16 GAUGE	CW16
14 GAUGE	CW14
12 GAUGE	CW12
10 GAUGE	CW10
8 GAUGE	CW8

## PARALLEL PRIMARY WIRE

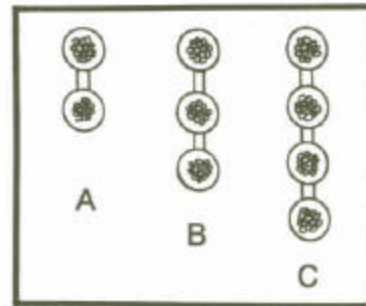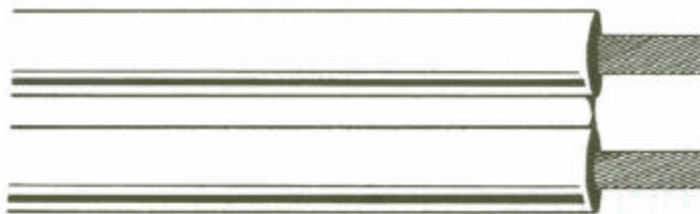

#### COLOR CODE

- A. 2 CONDUCTOR RED/BLACK
- B. 3 CONDUCTOR GREEN/YELLOW/BROWN
- C. 4 CONDUCTOR GREEN/YELLOW/BROWN/WHITE

SIZE	PART NUMBER
18 GAUGE 2 CONDUCTOR	PP182
16 GAUGE 2 CONDUCTOR	PP162
16 GAUGE 3 CONDUCTOR	PP163
16 GAUGE 4 CONDUCTOR	PP164

\*OTHER SIZES AVAILABLE ON REQUEST