

- TYPE "E" TEFLON
- SPEAKER WIRE
- MACHINE WIRE

TYPE "E" TEFLON



| SIZE | PART NUMBER |
|----------|-------------|
| 20 GAUGE | T20 |
| 18 GAUGE | T18 |
| 16 GAUGE | T16 |
| 14 GAUGE | T14 |
| 12 GAUGE | T12 |
| 10 GAUGE | T10 |

SPECIFICATIONS

VOLTAGE RATING 600V
 TEMPERATURE RATING 200 °C
 SPARKTEST 3400V
 IMPULSE TEST 13.5KV PEAK
 INSULATION RESISTANCE 5000
 MEGOHMS/1000 FT.
 COLDBEND 2 TURNS @ -65 °C
 SHRINKAGE 0.03" MAX. IN 12"
 @ 290 °C

SPEAKER WIRE




| SIZE | PART NUMBER |
|----------------------|-------------|
| 18 GAUGE 2 CONDUCTOR | SW182 |

Insulated speaker wire that is two conductors and bonded for zip apart feature. One conductor tinned, one conductor bare copper with clear insulation.

*Available In Clear Only

MACHINE TOOL WIRE

(TFFN/THHN)

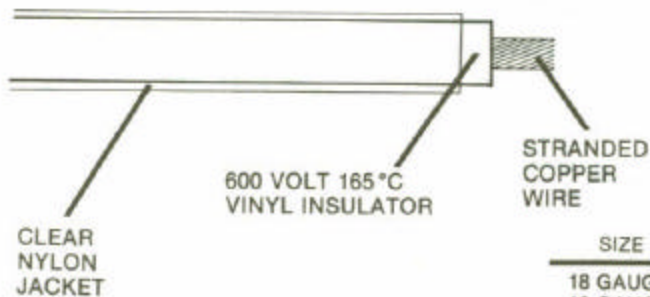

| SIZE | PART NUMBER |
|----------|-------------|
| 18 GAUGE | CWN18 |
| 16 GAUGE | CWN16 |
| 14 GAUGE | CWN14 |
| 12 GAUGE | CWN12 |
| 10 GAUGE | CWN10 |
| 8 GAUGE | CWN 8 |

COLOR CODE

- 0 BLACK
- 1 BROWN
- 2 RED
- 3 ORANGE
- 4 YELLOW
- 5 GREEN
- 6 BLUE
- 7 PURPLE
- 8 GRAY
- 9 WHITE

*AVAILABLE IN 500' ROLLS ONLY